



# CVAP® COOK/HOLD CABINETS



## CHV5 SERIES CHV5-04HP | CHV5-04UV | CHV5-05UV | CHV5-05UV-ST | CHV5-14UV

CVap Cook and Hold Cabinet: Includes C-Touch Control, HACCP Temperature Downloads, and Convection Cooking.

### SHORT FORM SPECS

Shall Be Winston CVap Cook and Hold, model \_\_\_\_\_. Unit to utilize a C-Touch control with processor, that utilizes calibration-free thermistors to adjust evaporator and air temperatures in 1°F increments. Features must include a minimum of eight programmable channels which are lockable, USB HACCP download for temperature monitoring and convection fan.

### CONFIGURATIONS

**Countertop:** Shallow depth to allow placement on standard 30" countertop. Also can be fitted with 1" wheels for under counter use.

**Half-Sized:** Easily mobile versions, allowing operator to see over cabinet when transporting. Most half sized units are also stackable for increased versatility. Some versions available for under counter use with 1" wheels.


**Full-Sized:** Provides maximum capacity for high volume operators.

### CVAP ADVANTAGE

The CVap CHV is essentially a Cook and Hold on steroids. It can do the traditional "low and slow" cooking...with more control and insane yields. It also has the versatility to bake, braise, poach or low-temp steam, and it can be used in sous vide mode for increased precision. We've got volumes of science and data to back us up, but only so much space here. So, if you want to learn more, go to our website, [www.winstonfoodservice.com](http://www.winstonfoodservice.com) and geek out with us.



TECHNICAL SUPPORT NOTIFICATIONS

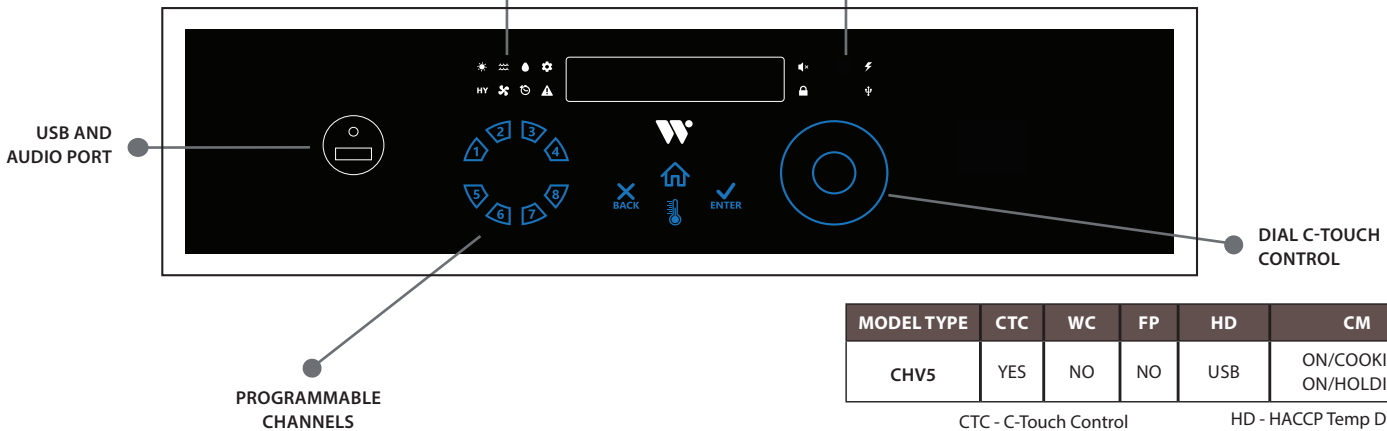

MODEL TYPE	CTC	WC	FP	HD	CM	AP
CHV5	YES	NO	NO	USB	ON/COOKING ON/HOLDING	YES

CTC - C-Touch Control  
 WC - Wireless Connectivity  
 FP - Food Probe  
 HD - HACCP Temp Download  
 CM - Convection Mode  
 AP - Audio



## Cabinet Specifications

CHV5-04HP | CHV5-04UV | CHV5-05UV | CHV5-05UV-ST | CHV5-14UV

### MODEL NUMBER DESCRIPTIONS

#### EQUIPMENT TYPES

HO = HOLDING  
CH = COOK/HOLD  
RT = RETHERM  
UB = UNIVERSAL BIN

### SERIES

**C H V 5 - 0 4 H P**

EQUIPMENT TYPE

TECHNOLOGY

PAN CAPACITY

### PAN CONFIGURATION

#### PAN CONFIGURATIONS

HP = HALF PAN  
SP = SHEET PAN  
UV = UNIVERSAL

MODEL #	CAPACITY*			EXTERIOR DIMENSIONS**			ELECTRICAL					INT'L	SHIP WEIGHT LBS(KG)	AVAILABLE OPTIONS
	SHEET PAN (18" x 26")	HALF SHEET PAN (18" x 13")	HOTEL PAN (12" x 20" x 2.5")	HEIGHT IN.(MM)	DEPTH IN.(MM)	WIDTH IN.(MM)	VOLTS	PHASE	WATTS	AMPS	NEMA***			
CHV5-04HP	N/A	4	4	34(864)	26.8(681)	20.2(511)	208	1	2400	11.5	6-20P	Call Factory	160(73)	A,B,C,E,F,J,L,M,O,P
							240	1	2400	10	6-20P			
CHV5-04UV	4	8	8	35.8(909)	34.5(876)	28(711)	208	1	4803	23	6-30P	Call Factory	198(90)	A,B,C,E,F,J,K,M,O,P
							240	1	4803	20	6-30P			
CHV5-05UV	5	10	10	39.3(997)	34.5(876)	28(711)	208	1	4803	23	6-30P	Call Factory	250(113)	A,C,E,F,J,K,M,O,P
							208	3	4803	10.5	15-20P			
							240	1	4803	20	6-30P			
CHV5-05UV-ST****	10(2 x 5)	20(2 x 10)	20(2 x 10)	76.8(1950)	34.5(876)	28(711)	208	1	4803	23	6-30P	Call Factory	500(226)	A,C,E,F,J,K,M,O,P
							208	3	4803	10.5	15-20P			
							240	1	4803	20	6-30P			
CHV5-14UV	14	28	28	73.2(1857)	34.5(876)	28(711)	208	1	7503	36.1	6-50P	Call Factory	420(190)	A,C,E,F,J,K,M,O,P
							208	3	7503	23.7	15-30P			
							240	1	7503	31.3	6-50P			

\*Capacity- Determined by 3.5"(89mm) adjustable spacing, with a load limit of 65lb (29.25kg) per rack. | \*\*Exterior Dimensions- Based on use of standard supplied 3" Heavy Duty plate casters. 1" wheels, 5" casters, and 4" legs are available as an option on most models and will impact dims. | \*\*\*NEMA- Supplied with 84" (2134mm) (minimum) power cord and plug. | \*\*\*\* Stacked units require two outlets. Wattage listed is per unit.

**CONTROL:** C-Touch control with vapor and air temperatures to be adjusted in 1°F increments. Processor controlled calibration-free thermistors, accurate within +/- 2°F. Control allows for eight programmable (and lockable) channels, accommodates software updates via USB.

**MATERIALS:** To be commercial and institutional grade stainless steel interior and exterior.

**DOORS:** Insulated field-reversible door with magnetic handles. Full-sized units to include two dutch doors. Doors may be specified with windows, pass-through, or a combination of both.

**WATER FILL:** Includes auto water fill, using a 1/4" National Pipe Thread (NPT). May be used as manual fill, which includes low water detection. Low mineral potable water recommended, otherwise use deionizer/demineralizer to minimize corrosion damage.

**INSTALLATION REQUIREMENTS:** Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything omitting heat that would allow the exterior of the Winston cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for requirements specific to the location.

**INDUSTRY COMPLIANT:** Equipment complies with domestic and most international requirements; such as UL, C-UL, UL Sanitation, CE, MEA, and others.

**WARRANTY:** Limited one-year warranty (excludes gaskets, lamps/lights, hoses, power cord, glass panels, and evaporator). Warranty disclaimer for improper cleaning, installation, and/or maintenance. Ask for complete warranty disclosure.

### SPECIFY THE FOLLOWING WHEN ORDERING:

#### Standard (No additional cost):

- Voltage and Phasing Preference:  
208V or 240V, three or single phase.
- Hinge Preference: Left or right hinge.

#### Optional (Additional cost):

- |                                |                      |
|--------------------------------|----------------------|
| A. 5" Plate Casters            | I. Transport         |
| B. 1" Wheels                   | J. Locking Handle    |
| C. Window                      | K. Security Package  |
| D. Flip-Up Lexan Door          | L. 4" Legs           |
| E. Pass Through                | M. 6" Legs           |
| F. Pass Through - Window       | N. Auto Water Fill   |
| G. Pass Through - Flip-Up Door | O. Cord Wrap         |
| H. Full Perimeter Bumper       | P. Extended Warranty |

#### Accessories & Supplies (Additional cost):

- |          |   |
|----------|---|
| PS2206-4 | Wire rack-chrome (4-pack)                 |
| PS2206-5 | Wire rack-chrome (5-pack)                 |
| PS2938-4 | Wire rack-stainless steel (4-pack)        |
| PS2980-2 | Wire rail (2-pack)                        |
| PS2935-2 | Wire rail - 04HP (2-pack)                 |
| PS2429   | External water filter for auto water fill |
| PS2696   | Mobile water removal system               |
| PS3171   | Leg and shelf kit for 04UV and 05UV       |
| PS3174   | Stacking kit for 04UV and 05UV            |
| PS3167   | Drain kit for stacked pair                |

**BUY WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE!**

Factory direct at [winstonind.com/buyparts](http://winstonind.com/buyparts)